

FC-200 FIELD CONTROLLER




FC-200

- Integrated Bluetooth® technology
- Optional WLAN
- 520 MHz Intel XScale® processor
- Optional radio module
- Super-bright 3.8" full colour touch screen interface

It's time.

Perfect Partner

The FC-200 is the ideal field controller to use with the entire Topcon range of positioning instruments. Whether you are carrying out precise monitoring with the GPT-9000A robotic total station, setting out a pipeline using our GR-3 dual frequency GNSS units or carrying out a leveling run with the DL-101C; when used with Topsurv data collection software, the FC-200 has everything you need to get the job done rapidly!

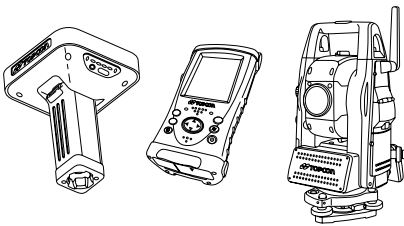

Communication Skills

When it comes to transferring data to your PC, take your pick from standard CF or SD Card or even use the USB 1.1 Type A slot to plug your USB memory stick and transfer files fast and efficiently.

The integrated Bluetooth can be used to interface to any GPRS enabled cell phone to either receive NTRIP corrections whilst carrying out Network RTK, or beam your full days work back to the office! And of course, you can use ActiveSync on your PC to transfer data using either Bluetooth or USB cable.

Powerful and Rugged

Combining a powerful Windows CE .net 5.0, 520MHz Intel XScale processor, 3.8" super-bright full colour TFT display, up to 1/2 GB flash storage memory and drop resistance to one metre on to concrete, the lightweight FC-200 has absolutely everything you could need to get the job done!

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Topcon is under license. Other trademarks and trade names are those of their respective owners.

Specifications subject to change without notice
©2008 Topcon Corporation. All rights reserved. 06/08



SPECIFICATIONS

FC-200

PROCESSOR

Type	Intel XScale PXA 270
Speed	520MHz
Operating System	Windows CE .net 5.0

MEMORY

RAM	256MB SDRAM
ROM	512MB Flash ROM

DISPLAY

Resolution	240 x 320 QVGA
Type	3.8 inch TFT Colour LCD, 256K Colours
Light	LED Backlight

INTERFACE

	Serial RS-232C (D-sub 9), USB rev 1.1 (Type Mini-B), USB rev 1.1 (Type A), Compact Flash (Conforming to Type I/II), SDIO / MMC card slot
Radio	Optional wireless connection (proprietary 30 pin unit) RS-1 2.4GHz Spread Spectrum sealed unit
Wireless	Optional 802.11b/g WiFi
Bluetooth	Bluetooth 1.2 Class II
Audio	Sealed Mono Speaker and Microphone

ENVIRONMENTAL

Water / Dust Resistance	IP66
Operating Temperature	-20°C to +50°C
Storage Temperature	-30°C to +60°C
Shock Resistance	Unit functions drop proof from 1 meter
Operating Time	15 - 25 hours (typical use)

BATTERY

Type	Lithium Ion
Voltage / Capacity	7.4v / 2200mAh
Charging Time	4 hours
Dimensions	Height 196 mm x Width 107 mm x Depth 61 mm
Screen Dimensions	Height 76 mm x Width 56 mm
Weight	0.72 kg (including battery)



Topcon Europe Positioning B.V.

Essebaan 11 · 2908 LJ Capelle a/d IJssel · The Netherlands
Phone: + 31 (0) 10 - 4585077 · Fax: + 31 (0) 10 - 2844941
e-mail: survey@topcon.eu · www.topcon.eu